

# SiGen Gateway HomePro TP Installation Guide

Version: Draft A  
Release date: 2025-01-22




## ! Caution

- Trained or experienced electrical personnel are required to operate the equipment.
- Operators should be familiar with national/regional laws, regulations and standards, the structure and working principle of relevant systems.
- Before operations, please carefully read operating requirements and precautions in this document and Important Notice. Any equipment damage caused by improper operation will not be covered under warranty.


## 1 Product Description

### 1.1 Appearance and Dimensions

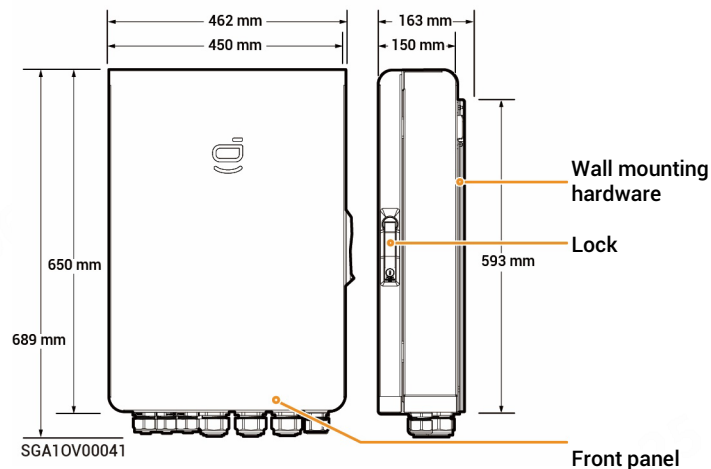


### 1.2 Port Description

#### Bottom view

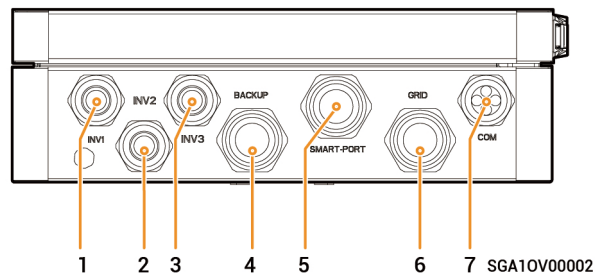

S/N	Name	Marking
1	Wire-in port of inverter 1	INV1
2	(Reserved) Wire-in port of inverter 2	INV2
3	(Reserved)	INV3
4	Wire-in port of backup household loads	BACKUP
5	(Reserved)	SMART-PORT
6	Wire-in port of power grid	GRID
7	Wire-in port of communication	COM

## Interior view

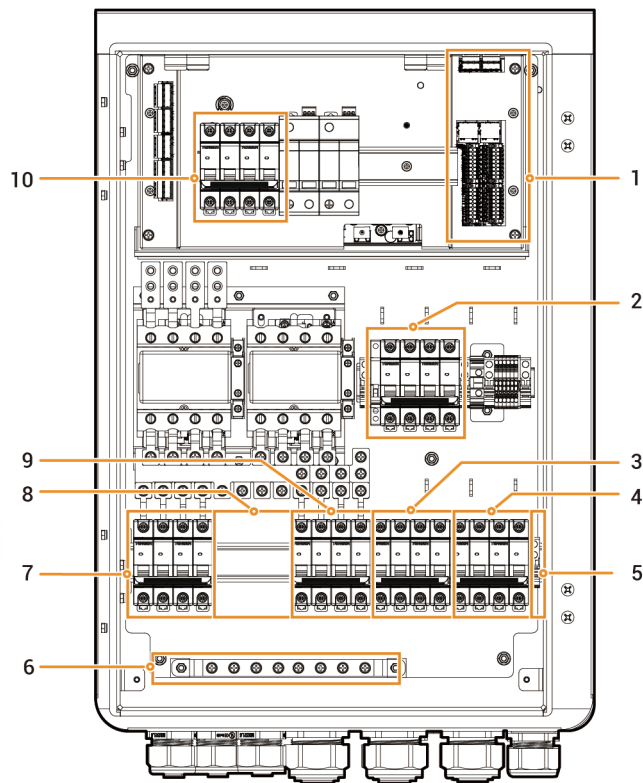

SGA10V00039

S/N	Label	Description
1	–	Communication terminal (connecting to FE or DI communication cable)
2	QS1	Bypass switch
3	QF2	Miniature circuit breaker (Smart loads <sup>[1]</sup> /Generator)
4	QF1	Miniature circuit breaker (connecting to Power grid)
5	–	GND terminal
6	–	Grounding copper busbar
7	QF3	Miniature circuit breaker (connecting to Inverters 1)
8	–	(Reserved) Mounting location of circuit breaker (connecting to Inverters 2)
9	QF4	Miniature circuit breaker (connecting to Backup household loads)
10	QF5	Surge protection device

### Note [1]:

- All the power equipment in the owner's home can be connected as smart loads.
- To ensure that this product maximizes the benefits to users, it is recommended that the high-power equipment be connected as smart loads (heat pumps, pool heaters, clothes dryers, immersion heaters, etc.), which can be cut off when the energy storage system has low power. Other low-power equipment are connected as household loads (lights, routers, etc.)

## Danger

Please check that all switches are turned off at the factory. Always avoid hot-line work.

## 2 Pre-installation Check

- Check whether the components are entirely supplied against the packing list and whether the appearance is in good condition. For any problem, contact your sales representative.
- Parts and accessories supplied with the packing box are personal assets of the owner and must not be taken away from the installation site.
- Check personal protective equipment and installation tools to ensure that they are complete; If not, please make them up.
- Check and ensure the completeness of personal protective equipment and installation tools; replenish if necessary.

### Protective equipment



Safety hat



Safety glasses



Dust mask



Protective gloves




Insulating gloves



Insulating shoes

### Installation tool




Power drill



Vacuum cleaner



Wire cutter



Crimp tool



Crimping pliers



Wire stripper



Scissors




Cable tie



Heat shrinkable sleeve



Heat gun



Insulation screwdriver set



Insulation sleeve set




Torque socket wrench




Marker



Level



Tape measure



Multimeter

## Installer-provided cable

### Caution

- The specifications of the Installer-provided cable must comply with the cable regulations and standards of the country/region standards.
- L1, L2, L3, N and PE should be connected to other equipment in sequence without mixing.

S/N	Cable name		Recommended specifications
1	Functional ground cable		Outdoor single-core copper flexible cable Cross-sectional area of core conductor: 6–10 mm <sup>2</sup> outer diameter: 5–8 mm
2	AC cable	Connected to inverter	Outdoors five-core copper flexible cable (L1, L2, L3, N, PE) <ul style="list-style-type: none"> <li>SigenStor EC/SigenStor AC/Sigen Hybrid (5.0–15.0) TP: Cross-sectional area of core conductor: 4–6 mm<sup>2</sup>; outer diameter: 10–21 mm</li> <li>SigenStor EC/SigenStor AC/Sigen Hybrid (17.0–20.0) TP: Cross-sectional area of core conductor: 6–10 mm<sup>2</sup>; outer diameter: 19–22 mm</li> <li>SigenStor EC/SigenStor AC/Sigen Hybrid 25.0 TP: Cross-sectional area of core conductor: 10–16 mm<sup>2</sup>; outer diameter: 22–25 mm</li> <li>SigenStor EC/Sigen Hybrid 30.0 TP: Cross-sectional area of core conductor: 16 mm<sup>2</sup>; outer diameter: 22–25 mm</li> </ul>
3		Connected to backup household loads	Outdoor five-core copper flexible cable (L1, L2, L3, N, PE) Cross-sectional area of core conductor: 16–35 mm <sup>2</sup> ; Outer diameter: 22–32 mm
4		Connected to power grid	
5		(Optional) Connected to smart loads/Generator	
6	RJ45 network cable		Outdoor eight-conductor shielded twin-twisted pair cable Cross-sectional area of core conductor: 0.13–0.2 mm <sup>2</sup> Outer diameter: 4–7.5 mm Single cable length: ≤ 100 m <sup>[1]</sup> RJ45 network cables are EIA/TIA 568B standard network cables
7	(Optional) DI/DO signal cable		Outdoor two-conductor shielded cable Cross-sectional area of core conductor: 0.2–1.5 mm <sup>2</sup> Outer diameter: 2–4 mm

Note [1]: The cable length should be limited for good communication. Too long cable degrades the communication effect. FE communication distance: ≤ 100 m.

### 3 Site Selection Requirements

---

#### Tips

- The standard warranty only applies to the installation scenarios recommended by our company. Please follow the specified guidelines.
- During actual installation, the selection of installation location should comply with local firefighting, environmental protection regulations, and other relevant laws. The specific installation location planning should be subject to the installer or engineering, procurement, and construction (EPC) contracts.

#### Installation environment


- Do not install the equipment in smoky, flammable, or explosive environments.
- Avoid exposing the equipment to direct sunlight, rain, standing water, snow, or dust. Install the equipment in a sheltered place. Take preventive measures in operating areas prone to natural disasters such as floods, mudslides, earthquakes, and typhoons.
- Do not install the equipment in an environment with strong electromagnetic interference.
- Ensure that the temperature and humidity of the installation environment comply with the equipment's requirements.
- The equipment should be installed in an area that is at least 500 m away from corrosion sources that may result in salt damage or acid damage (corrosion sources include but are not limited to seaside, thermal power plants, chemical plants, smelters, coal plants, rubber plants, and electroplating plants).

#### Installation position

- Do not tilt or overturn the equipment to ensure that it is installed horizontally.
- Do not install the equipment in places easily touched by children.
- Do not install the equipment in places with fire or damp.
- Please keep away from the daily work and living places.
- Do not install the equipment in a sealed, poorly ventilated location without fire protection measures and difficult access for firefighters.
- The equipment is hot when it is running. If the equipment is installed indoors, please ensure good indoor ventilation and avoid significant indoor temperature rise by 3°C while the equipment is running. Otherwise, the equipment will be derated.
- Do not install the equipment in mobile scenarios such as RVS, cruise ships, and trains.
- You are advised to install the equipment in places that are easy to access, install, operate, maintain status.


## Mounting surface

- Do not install the equipment on a flammable carrier.
- The installation carrier must meet load-bearing requirements. Solid brick-concrete structure, concrete walls is recommended.
- The surface of the installation carrier must be smooth and the installation area must meet the installation space requirements.
- No water or electricity is routed inside the carrier to prevent drilling hazards during equipment installation.

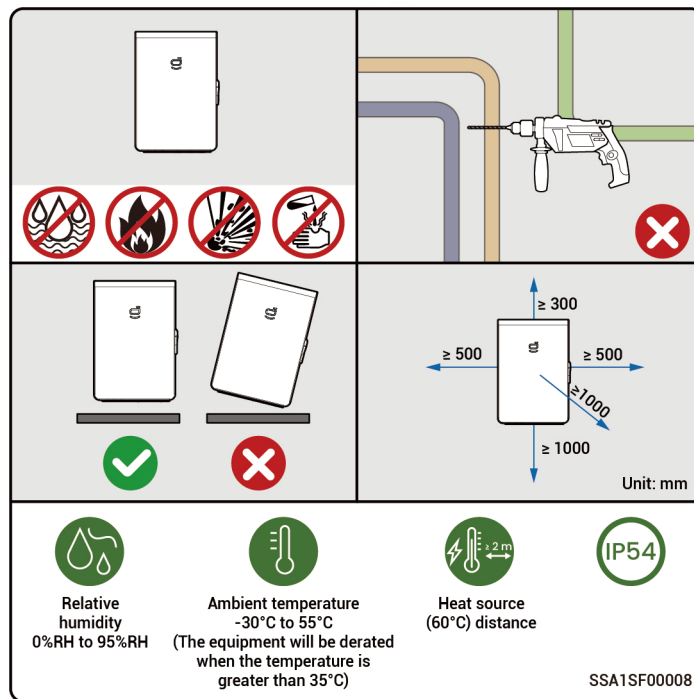


## 4 Equipment Installation

1

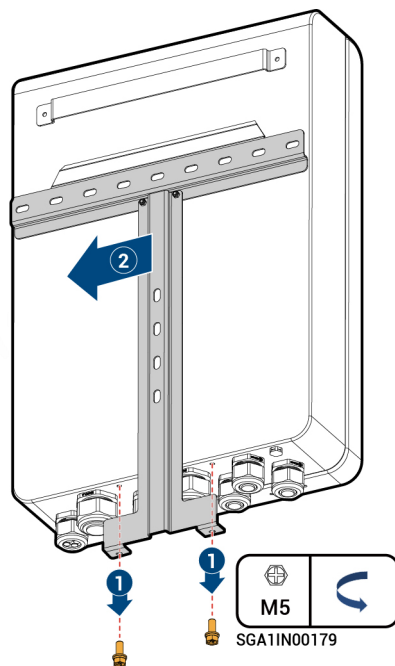


2

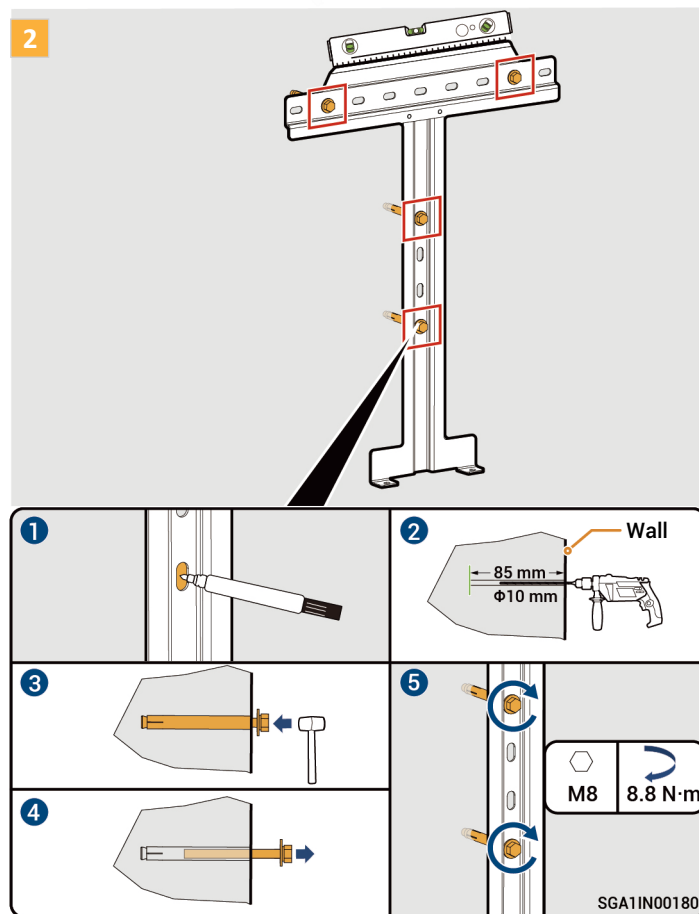



3

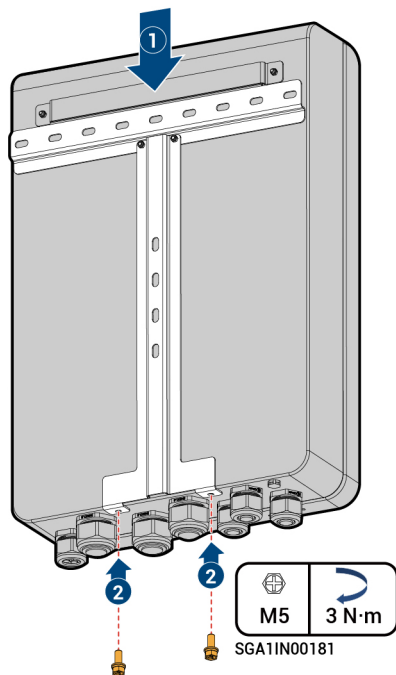

## 5 Cable Connection

### 5.1 Recommended Routing


#### Danger

Do not perform operations on the equipment with power on. Before operation, please make sure all power supplies to the equipment have been disconnected, including but not limited to the grid side, inverter and Generator power switches.

#### Caution

- Connect cables according to the corresponding labels to prevent personal injury and equipment damage caused by incorrect cable connection.
- To ensure that the inverters, loads, and the Gateway are connected to the common ground point, connect the PE cable.



- 1 Connect to Inverter
- 2 Connect to Backup household loads
- 3 Connect to Smart loads/Generator
- 4 Connect to Power grid
- 5 Communication cable / Functional ground cable

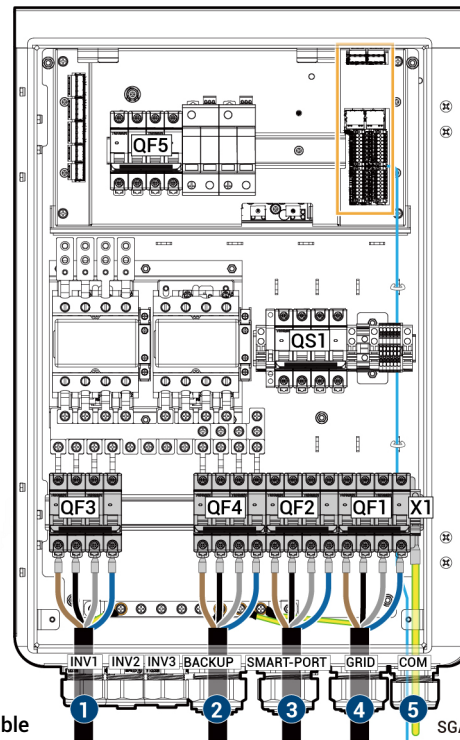

SGA11N00171


## 5.2 Opening Equipment Door

1

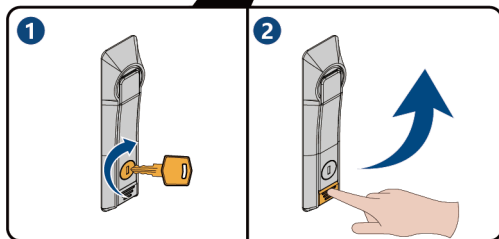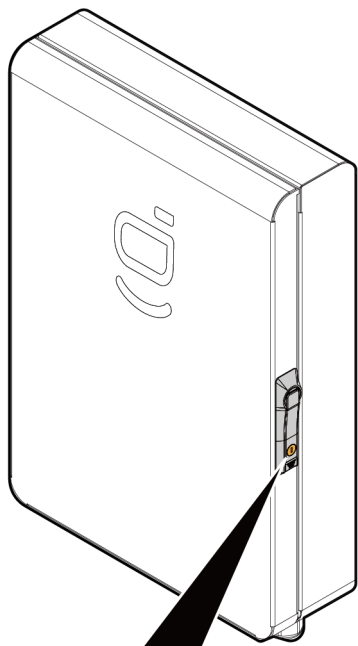

SGA1IN00011

2

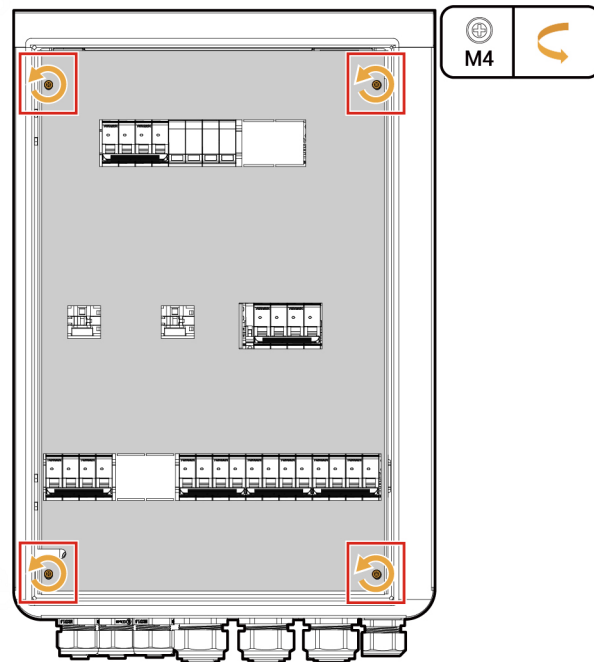


SGA1IN00184




## 5.3 Functional ground cable Connection

### ⚠ Caution


In off-grid mode, the N wire in the system is short-connected to the functional grounding wire through the relay to create a grounding system. When earth leakage or short circuit occurs in loads, leakage protection and overcurrent protection devices are triggered to prevent these faults.

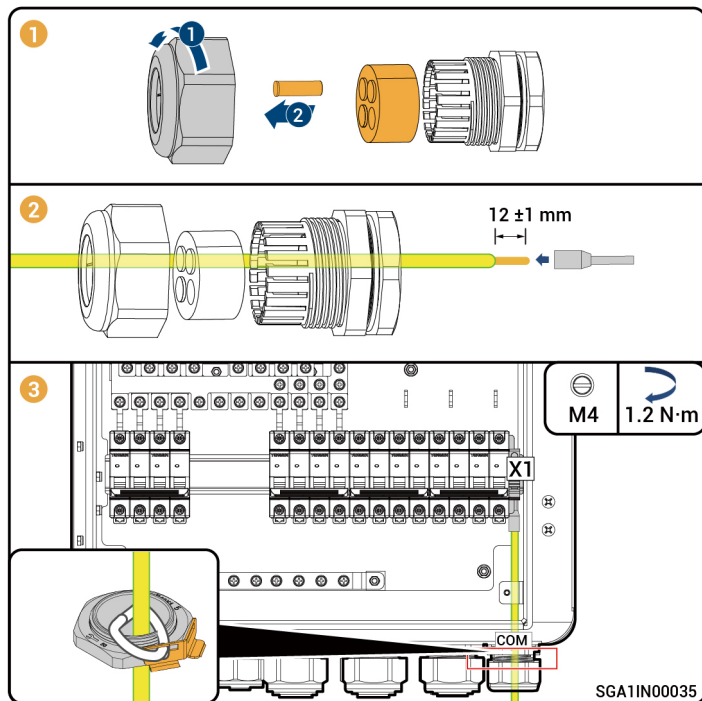

## 5.4 Connecting Inverter / Backup household loads / Power Grid

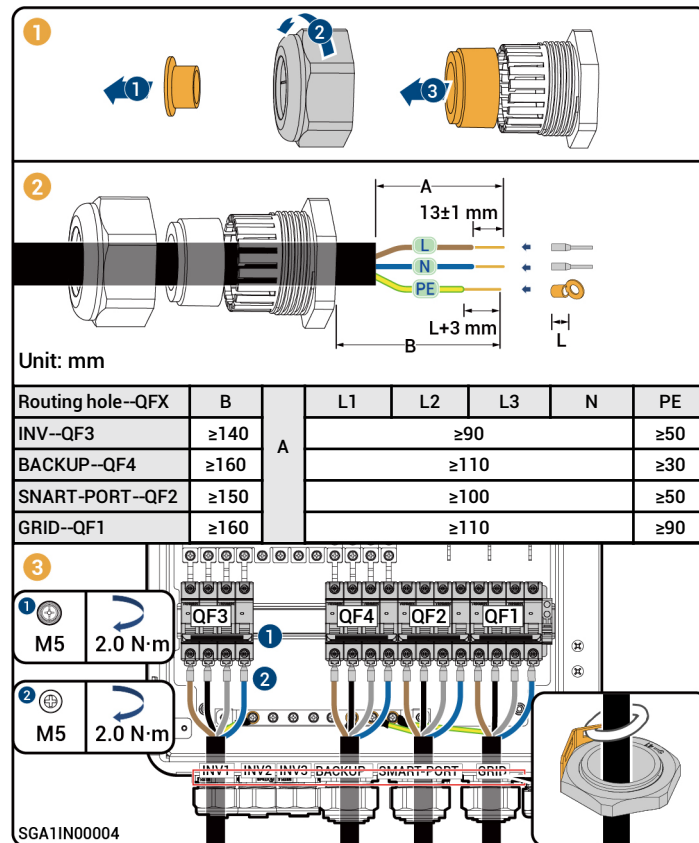


## 5.5 Communication port introduction

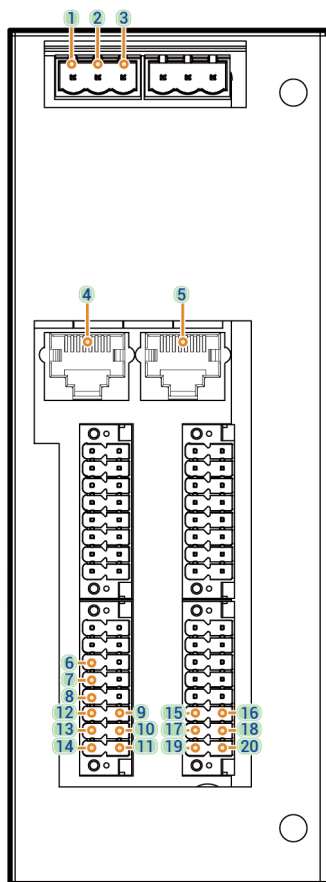

### Tips

For the Generator that starts when the dry contacts are open, connect the dry contacts to DO3-NO and DO3-COM. For the Generator that starts when the dry contacts are closed, connect the dry contacts to DO3-NC and DO3-COM.


Interface Description	S/N	Definition	Function	Description
(Reserved) 485 (RS-485 interface)	1	485_A	RS-485 signal_A+	Used to connect devices for RS-485 communication.
	2	485_B	RS-485 signal_B-	
	3	PE	Protective earthing	
FE (network cable interface)	4	FE1	Fast Ethernet 1	Used to connect an inverter.
	5	FE2	Fast Ethernet 2	Used to connect the Sigen EV AC charger, inverter, router, etc.
DO3	6	DO3-NO	Digital output 3 - Normal Open	<ul style="list-style-type: none"> <li>DO3 interface can be used for controlling generator start in two-wire start mode.</li> <li>NO/COM is normally open contact and NC/COM is normally close contact.</li> </ul>
	7	DO3-COM	Digital output 3 - Common	
	8	DO3-NC	Digital output 3 - Normal Close	
DO2	9	DO2-NO	Digital output 2 - Normal Open	<ul style="list-style-type: none"> <li>DO2 is used for the output of the contactor status feedback signal for the Generator.</li> <li>NO/COM is normally open contact and NC/COM is normally close contact.</li> </ul>
	10	DO2-COM	Digital output 2 - Common	
	11	DO2-NC	Digital output 2 - Normal Close	
DO1	12	DO1-NO	Digital output 1 - Normal Open	<ul style="list-style-type: none"> <li>DO1 is used for the output of the contactor status feedback signal for the grid.</li> <li>NO/COM is normally open contact and NC/COM is normally close contact.</li> </ul>
	13	DO1-COM	Digital output 1 - Common	
	14	DO1-NC	Digital output 1 - Normal Close	

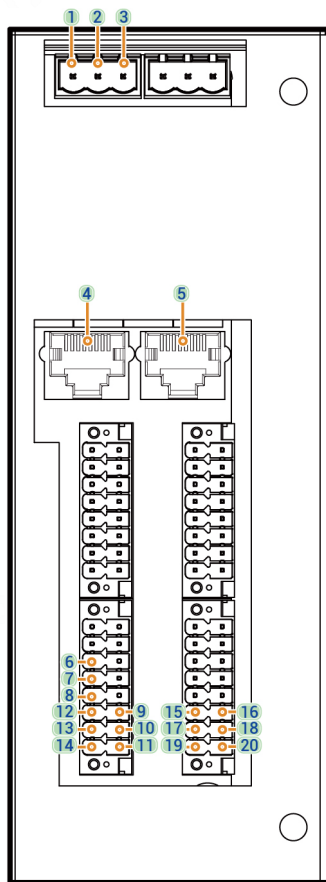


SGA10V00043

Interface Description	S/N	Definition	Function	Description
(Reserved) DI3 (Digital input signal 3)	15	DI3_+	Digital input 3	<ul style="list-style-type: none"> <li>DI3 can be used to connect the feedback signal of an external automatic transfer switch (ATS) to identify whether the "smart load port" of the Gateway is powered by the power grid or a Generator.</li> <li>Low impedance input (the feedback signal of the ATS is short-circuited) indicates that the port is powered by the power grid. High impedance input (the feedback signal of the ATS is open circuit) indicates that the port is powered by a Generator.</li> </ul>
	16	DI3_GND	Signal GND	
DI2 (Digital input signal 2)	17	DI2_+	Digital input 2	<ul style="list-style-type: none"> <li>DI2 can be used to connect a feedback signal of an external automatic transfer switch (ATS) to identify whether the "grid port" of the Gateway is powered by the power grid or a Generator.</li> <li>Low impedance input (the feedback signal of the ATS is short-circuited) indicates that the port is powered by the power grid. High impedance input (the feedback signal of the ATS is open circuit) indicates that the port is powered by a Generator.</li> </ul>
	18	DI2_GND	Signal GND	
DI1 (Digital input signal 1)	19	DI1_+	Digital input 1	Open circuit indicates that the emergency stop takes effect.
	20	DI1_GND	Signal GND	

### 5.5.1 Connecting RJ45 Network Cable

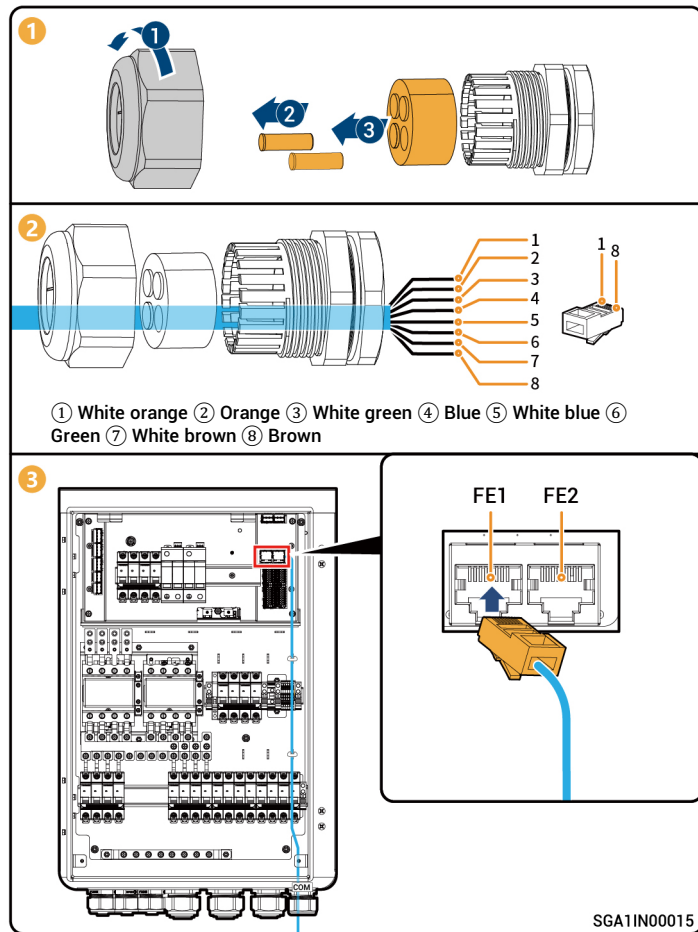


### 5.5.2 Connecting DI, DO Cable

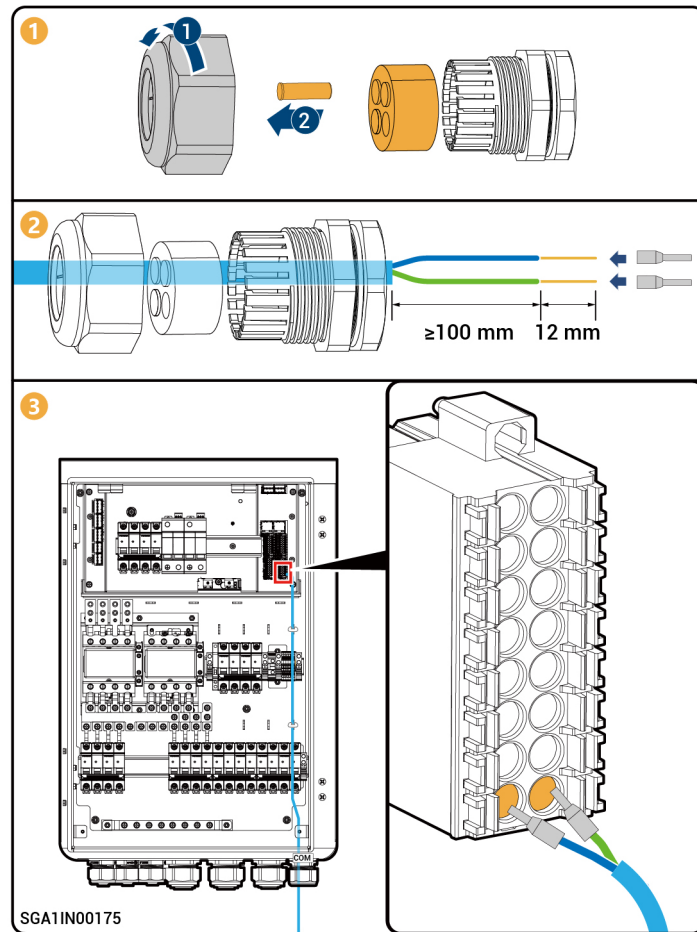

## 5.6 Installing Inner panel


Check the following items against the provided table, tighten routing holes, and install the protective covers.

S/N	Check Item
1	The equipment has been securely installed.
2	Ground cables, DC cables, signal cables, etc. are installed accurately without leftovers.
3	The cable fastening screws or terminals are properly installed.
4	There are no sharp spikes or acute angles at the cut point of the cable tie.
5	The Gateway protective cover is locked.
6	There is no construction left inside or outside the equipment.

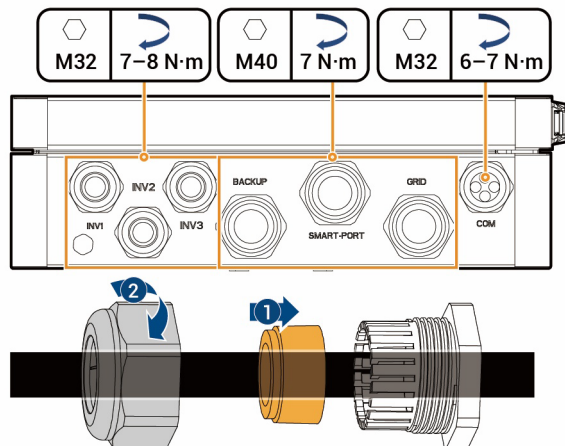

### Caution


Measure the voltage of the switch QF1 on the power grid side and check that the measured value is within the allowable range. Ensure that the cable is connected properly, tighten routing holes, and install protective covers.

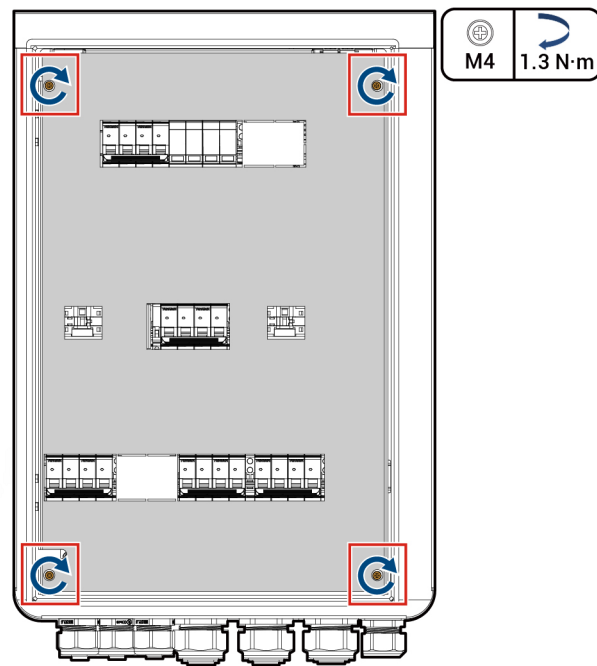

SGA1IN00174



## 6 Equipment Power-On

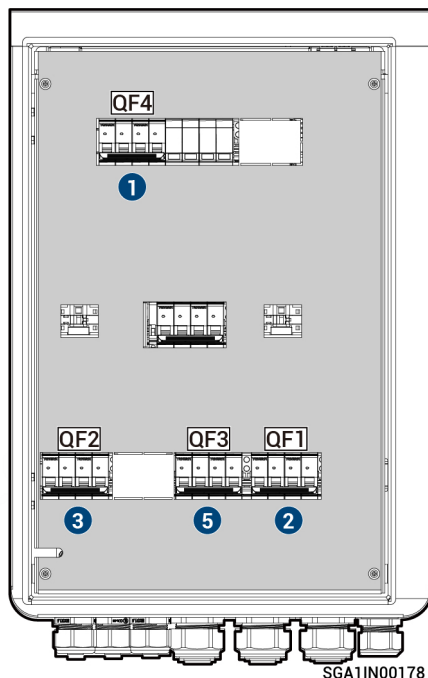

### Tips

- Turn on the front switch of the equipment.
- There is a risk of electric shock if the Gateway is left ungrounded.
- If the surge protective device is not switched on, failure of surge protection may lead to damage to household loads and Gateway.

1



### Caution

Do not turn on the miniature circuit breaker when it is not connected to its corresponding device.

- 1 Switch on the miniature circuit breaker (Surge Protection Device) QF4.
- 2 Switch on the miniature circuit breaker (Power grid) QF1.
- 3 Switch on the miniature circuit breaker (Inverter) QF2.
- 4 Wait until inverter is powered on.
- 5 Switch on the miniature circuit breaker (Backup household loads) QF3.

2

Upon completion of the operation, close the front panel of the Gateway and lock the sides with the key delivered with the case; the power-on is completed.

Sigenergy Technology Co., Ltd.



Website	LinkedIn	YouTube
---------	----------	---------

[www.sigenergy.com](http://www.sigenergy.com)



**Copyright © Sigenergy Technology Co., Ltd. 2025. All rights reserved.**

Description in this document may contain predictive statements regarding financial and operating results, product portfolio, new technology, configurations and features of product. Several factors could cause difference between actual results and those expressed or implied in the predictive statements. Therefore, description in this document is provided for reference purpose only and constitutes neither an offer nor an acceptance. Sigenergy Technology Co., Ltd. may change the information at any time without notice.