

Installing Enphase 400 A Consumption CTs

Use this instruction with the *Enphase IQ Gateway Metered Quick Install Guide* to install Enphase consumption monitoring current transformers (CTs). The Enphase IQ Gateway Metered ships with two CTs for monitoring single-phase production and consumption. The three-phase sites require three additional CTs to be ordered separately. The CTs that ship with the box is designed to fit most residential installations. In certain cases, such as small commercial sites, a larger CT may be needed to fit the thicker cables installed on the site. This 400 A Consumption CT has been designed for such applications. Read and follow all warnings and instructions in this guide and the quick install guide included with your IQ Gateway.

SAFETY

SAFETY AND ADVISORY SYMBOLS

	DANGER: This indicates a hazardous situation, which, if not avoided, will result in death or serious injury.
	NOTE: This indicates information particularly important for optimal system operation. Follow instructions carefully.

SAFETY INSTRUCTIONS

	DANGER: To reduce the risk of electric shock, always open or disconnect the circuit from the power distribution system (or service) of the building before installing or servicing the current transformers.
	DANGER: Risk of electrocution! Do not install CTs when current flows in the sensed circuit. Always install CT wires in the terminal blocks before energizing the sensed circuit.
	DANGER: If equipment is used in a manner not specified by Enphase Energy, the protection provided by the equipment may be impaired.
	DANGER: Risk of electric shock. Be aware that installation of this equipment includes the risk of electric shock. If you wire the IQ Gateway to the main load center before beginning wiring. If the subpanel cannot be de-energized, a qualified electrician may safely install the CTs as directed, making sure to connect the leads and then place the CTs around each wire and latch.
	DANGER: Risk of electric shock. Risk of fire. Only qualified personnel should troubleshoot, install, or replace the CTs.
	NOTE: Because of variances in switchboard design and main power feed, there may not always be enough space to install CTs.
	NOTE: Do not install the CTs in a switchboard where they exceed 75% of the wiring space of any cross-sectional area within the equipment.
	NOTE: Perform all electrical installations in accordance with all national and local electrical codes.
	NOTE: Restrict installation of current transformers in an area where they would block ventilation openings, or in the area of breaker arc venting.
	NOTE: Secure current transformer and route conductors so that they do not directly contact live terminals or bus.
	NOTE: When wiring the IQ Gateway Metered for production and consumption metering, install the current transformers (CTs) precisely as described for your application.
	NOTE: When installing CTs, it is important to match CT and sense voltage phases. Be sure to consistently identify the three AC lines at three points: the main load center feed, the Gateway, and the solar production circuit breaker. Wire colors may not always consistently identify L1, L2, and L3. If in doubt, use a multimeter to check.
	NOTE: Only run active conductors through the CT. The CT can monitor multiple active conductors. You may run more than one wire through the CT if all wires are in the same phase and they fit the opening in the CT.
	NOTE: For indoor use only.
	NOTE: Not suitable for connecting to safety extra low-voltage circuits (SELV) or equivalent.

SPECIFICATIONS

SPECIFICATION	CT-400-SPLIT-INT
CT type	Split core
CT accuracy (error rate)	<1.5%
Maximum primary supported current	400 A
Turns ratio	2500
Dimensions (mm)	93 × 111 × 25
Aperture (mm)	50 × 50
Supported cable size	Up to a maximum size of 300 kcmil conductors
Primary voltage (range)	250 VAC maximum
Frequency	50–60 Hz
Operating temperature	–40 to 70°C
Humidity	95%
Compliance	IEC 61869-1
Maximum operating altitude	2600 m
Pollution degree	2

INSTALLATION

For more information, see the reverse of this document for tips. Refer also to the IQ Gateway Metered Quick Install Guide.

Preparation

- A) If not already done, de-energize the home load panel and the PV system.


Remove any pre-installed Consumption CTs

- A) Remove the Line 1, Line 2, and Line 3 conductors circuit to which the Consumption CTs are connected.
- B) Remove the existing CTs.

Install the Consumption CTs

- A) Refer to the diagram on the reverse of this document for wiring.
- B) Install the Consumption CTs on active phases as required:
 - Locate the arrow on the CT label.
 - Make sure that the AC mains wire(s) are de-energized until you have secured the CT wires in the terminal blocks.
 - **To monitor consumption on Line 1:**
 - Connect the white wire to the white “C1” and the blue wire to the blue “C1” terminal.
 - Clamp the CT on the main supply Line 1. When the Consumption CT is on the Line 1 conductor, the arrow must point toward the load (away from the grid).
 - **To monitor consumption on Line 2:**
 - Connect the white wire to the white “C2” terminal and the blue wire to the blue “C2” terminal.
 - Clamp the CT on the main supply Line 2. When the Consumption CT is on the Line 2 conductor, the arrow must point toward the load (away from the grid).
 - **To monitor consumption on Line 3:**
 - Connect the white wire to the white “C3” terminal and the blue wire to the blue “C3” terminal.
 - Clamp the CT on the main supply Line 3. When the Consumption CT is on the Line 3 conductor, the arrow must point toward the load (away from the grid).
 - **Tighten all connections to 5 in-lbs (0.6 N m).**
- C) Close and secure the terminal block door of the Gateway.
- D) Turn on the PV system.

IQ Gateway Metered terminal block

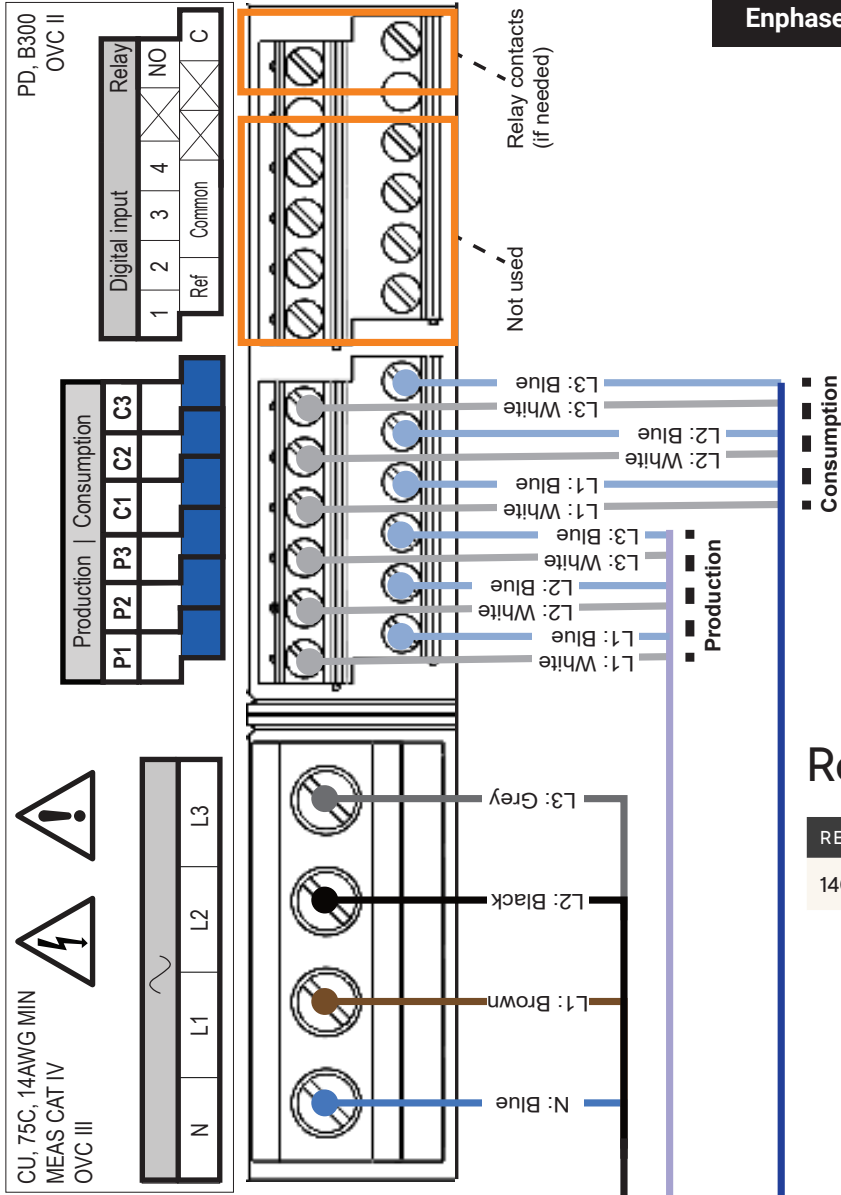

INSTALLATION TIPS

Installing multiple conductors in a single CT


If you need to install multiple conductors in a single CT, you must ensure that the conductors terminate on the same line conductor, so the voltage at the terminals of the two conductors will be 0 V between them.

- There are some challenges to this approach:
- It is easy to make a wiring error.
 - The conductors must fit within the CT.
 - All of the conductors on Line 1 must be bundled with the loads on Line 1 CT.
 - All of the conductors on Line 2 must be bundled with the loads on Line 2 CT.
 - All of the conductors on Line 3 must be bundled with the loads on Line 3 CT.
 - You may need to extend some of the circuits.


It is often possible to run all of the conductors in a service panel through a single set of Consumption CTs.

Revision history


REVISION	DATE	DESCRIPTION
140-00340-01	August 2023	Initial release

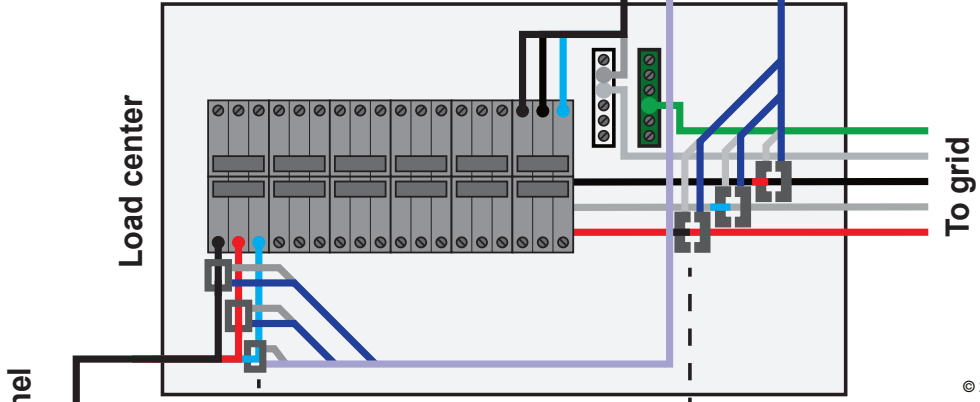

To solar sub-panel



Production CT.
Solid core.
The arrow must point toward the load — away from the solar array.



Consumption CT.
Split core.
The arrows must point toward the load — away from the grid.

Manufacturer's information
Falco Electronics Ltd
No. 1688 Xinyang North Road
Haicang District
Xiamen, Fujian
PRC, 361022
Tel: +(86) 592-310-2555

© 2023 Enphase Energy. All rights reserved. Enphase, the e and CC logos, IQ, and certain other marks listed at <https://enphase.com/trademark-usage-guidelines> are trademarks of Enphase Energy, Inc. in the US and other countries. Data subject to change. Rev01-2023-08-28

